

Attack Hose - DUZ(DURAMASTER)


Nitrile Rubber as cover and liner

Features

- Ribbed cover with great abrasion resistance, smooth liner for minimum friction loss
- Resistant to weather, UV, oxidation and most chemicals or petroleum products
- Flexible to deploy and roll up, compact coil for storage
- Temperature range from -4°F to 158°F (-20°C to 70°C)
- Applicable to Brass/Alu NST/NPSH threaded couplings, other type on request
- Standard length 50'; 100'; 200'; up to 660'
- Available with customized color, couplings and marking



Construction

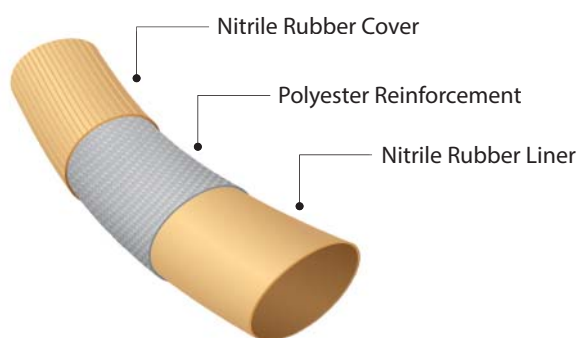

Standard

- Meets or exceeds UL 19 / BS 6391/ NFPA1961
- Within ISO-9001 quality management system

Technical Data

Nominal Size		Working Pressure		Burst Pressure		Average Weight		Wall Thickness		Certification
inch	mm	psi	bar	psi	bar	Lbs./ft.	Kg/m	inch	mm	
1-1/2"	38	250, 300	17, 21	750, 900	51, 63	0.21	0.31	0.083	2.1	
1-3/4"	45	250, 300	17, 21	750, 900	51, 63	0.24	0.36	0.114	2.9	
2"	52	250, 300	17, 21	750, 900	51, 63	0.30	0.45	0.118	3.0	
2-1/2"	65	250, 300	17, 21	750, 900	51, 63	0.39	0.58	0.118	3.0	
3"	75	250, 300	17, 21	750, 900	51, 63	0.58	0.87	0.118	3.0	
Nominal Size		Working Pressure		Burst Pressure		Average Weight		Wall Thickness		Certification
inch	mm	psi	bar	psi	bar	Lbs./ft.	Kg/m	inch	mm	
1-1/2"	38	218	15	654	45	0.209	0.311	0.083	2.1	
2"	52	218	15	654	45	0.279	0.415	0.114	2.9	
2-1/2"	65	218	15	654	45	0.383	0.570	0.118	3.0	