

Manual Water Monitor

Model:PS20B/PS30B/PS40B/PS20-40B



Features


- 1) Aluminum alloy construction.
- 2) 1200-1800-2400 LPM,selectable flow rate.
- 3) 360° rotation,-45° to + 75° Elevate.
- 4) Light weight,easy operation.
- 5) Totally hard coated anodized,strong strength,anti-corrosion.
- 6) Stainless steel handle control.
- 7) Stream sharper is build into the nozzle to make a better jetting.

Specification



Material	Body	Hard coated anodized aluminum alloy
	Nozzle	Hard coated anodized aluminum alloy
	Steam sharper	Hard coated anodized aluminum alloy
	Handle	Stainless steel
	Drain ball valve	Brass

Model	PS20B	PS30B	PS40B	PS20-40B
Working Pressure	8 bar	8 bar	8 bar	8 bar
Flow Rate	1200 LPM	1800 LPM	2400 LPM	1200-1800-2400 LPM,Selectable
Max. Jetting Range	45 meters	55 meters	60 meters	60 meters
Horizontal Rotation Angle	0° ~ 360°			
Vertical Rotation Angle	-45° ~ +75°			
Outlet	2 1/2" NH Male thread			
Inlet	3" (DN80) Flange (BS4504,ANSI #150,JIS,etc)			
Approx. Weight	14 KGS			

Construction

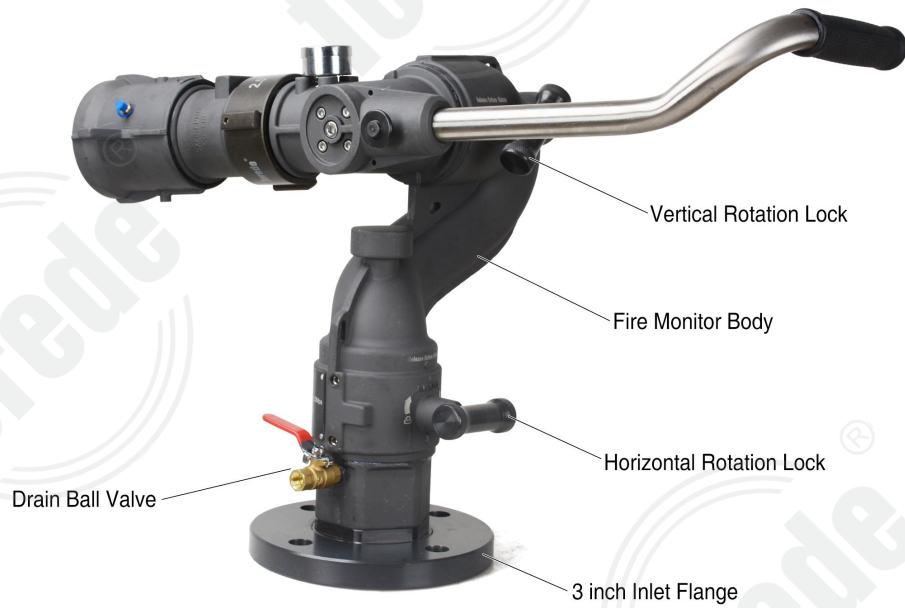

Dimension

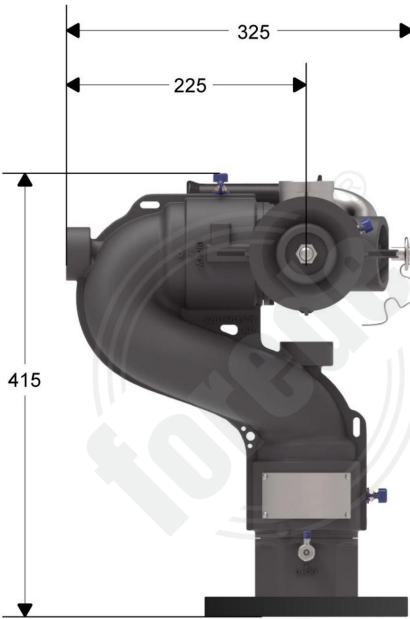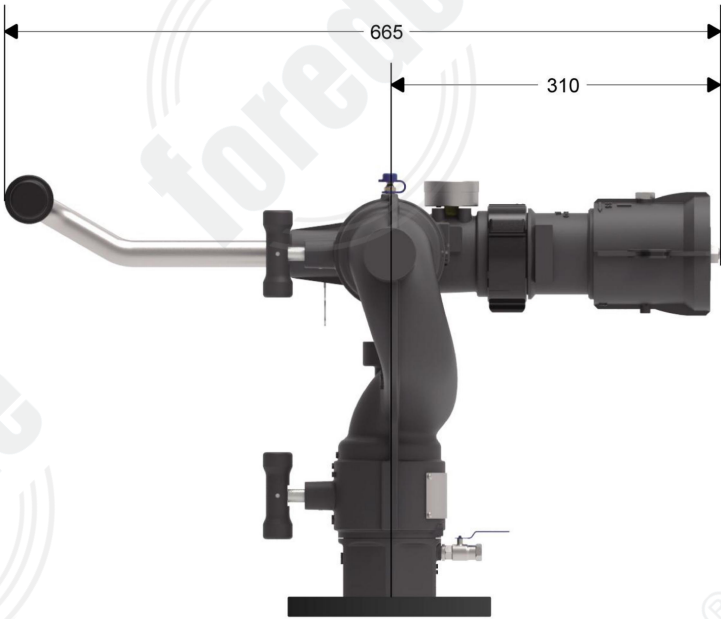

Angle

