


Selectable Gallonage Fire Nozzle Manual

▼ **QLD6.0/8III-SX**



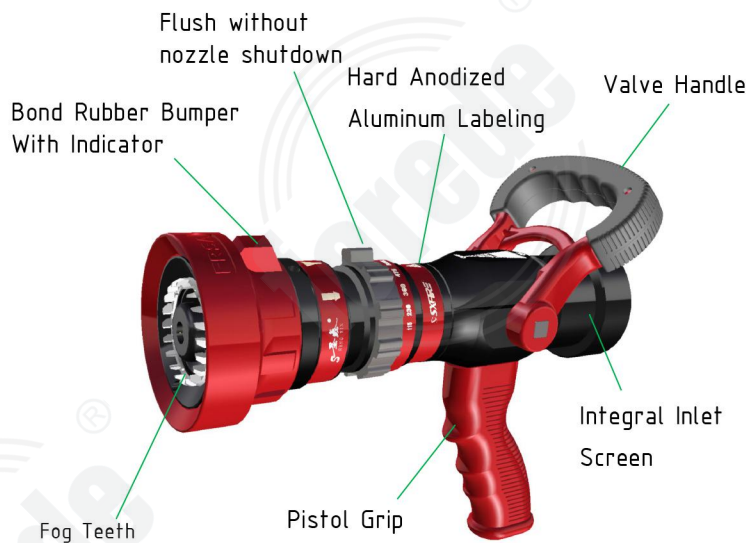


Specifications


Weight (excl. coupling)	1.6 kg
Material	body: aluminum valve: ABS handle: ABS bumper: rubber
Work Pressure	100PSI (7 bar)
Max. Pressure	360PSI (25bar)
Max. fog angle	120°
Throw range	40m @ 7bar
Flow range	115 L/S@7bar 230 L/S@7bar 360 L/S@7bar 475 L/S@7bar Flush
Inlet size	1.5" (40mm)
Coupling	Storz / NH / BSP /Russian type etc.

Features

- Pattern Identification
- Hard Anodized Aluminum labels,Laser Engraved
- Simple to operate (1/4 turn from straight stream to fog)
- Raised lug marks straight stream for limited visibility operations
- Easy to service & repair
- CCC certificate
- Compatible with Quick Attach Foam Tube

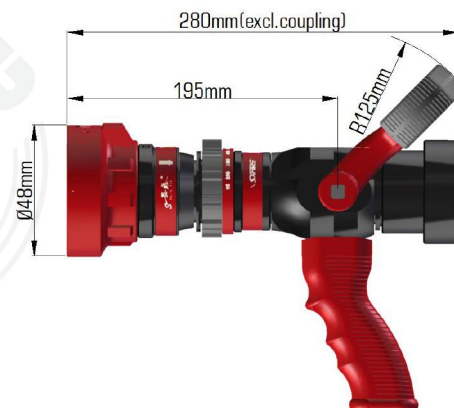


Operation

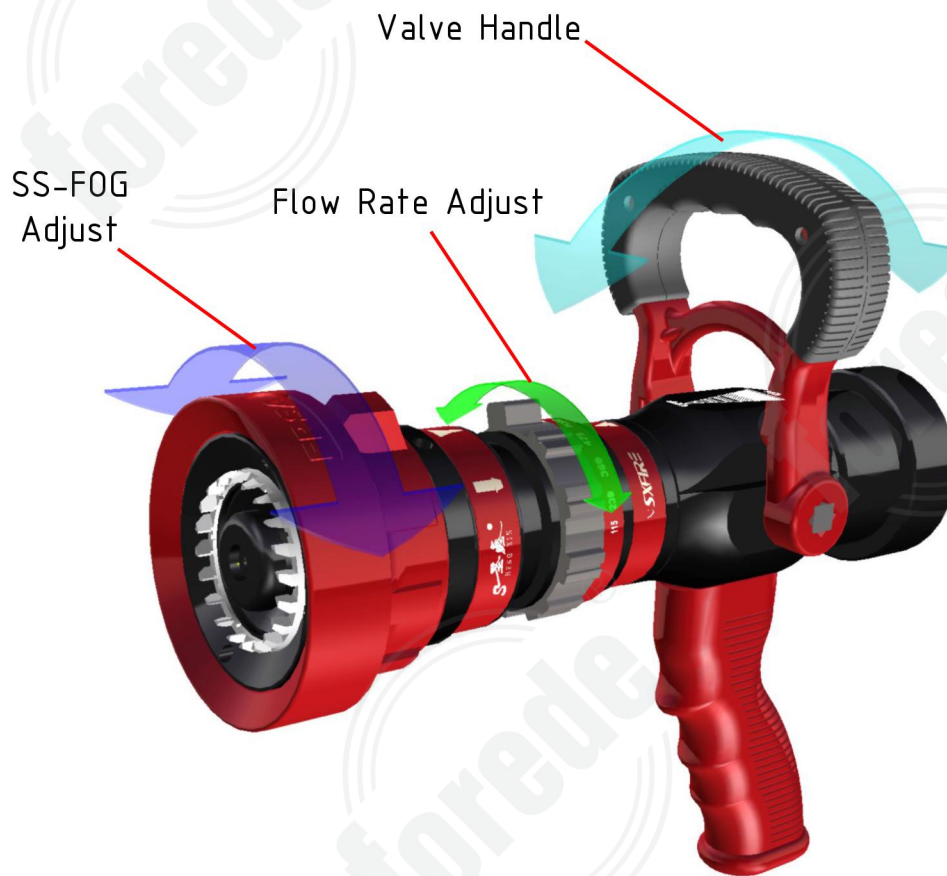

- Valve Close : Push the handle forward
- Valve Open : Pull the handle backward
- Flow rate adjust: Twist the flow adjust ring to obtain required flow rate
- SS-FOG Pattern : Twist the rubber bumper

Performance Chart

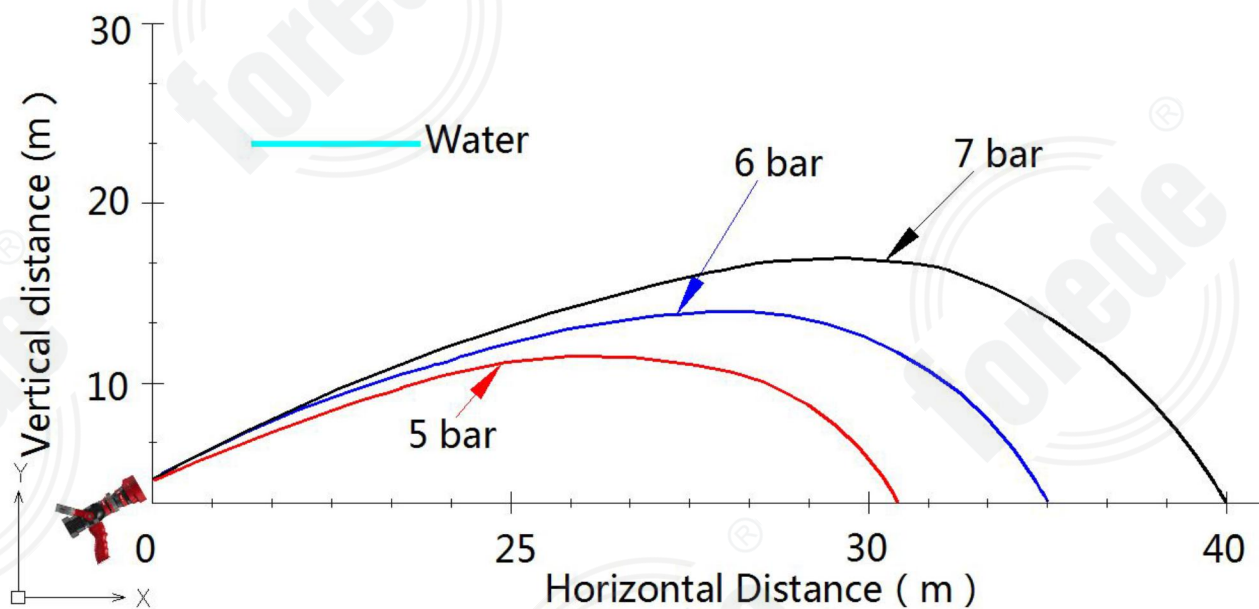

Testing Environment : 30° throw angle , wind speed $\leq 2\text{m/s}$