

TUNA[®] Sprinklers

Pendent Series

Model: NX025/ NX026 (New)




Standard Spray, Standard Response & Quick Response,
5mm & 3mm Bulb Type, K5.6, 1/2" Connecting Thread

UL approved TUNA[®] Standard Spray Pendent Sprinklers are glass-bulb types designed for use in fire sprinkler systems and for use in various commercial applications.


TUNA[®] Pendent Sprinklers new type launched in year 2019, with two response model series (NX025-standard response & NX026-quick response) are available with a variety of temperature ratings and finishes to meet different design requirements.

Model Types


NX025 Standard Response

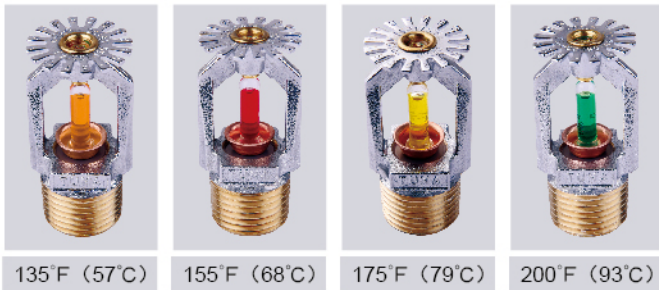

NX026 Quick Response

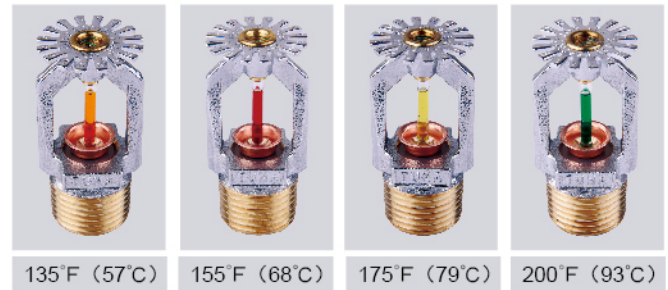

Specification

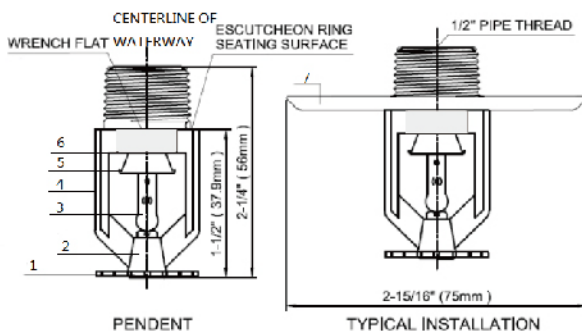

- 1 SSP Deflector; 2 Set Screw; 3 Glass Bulb;
- 4 Frame; 5 Button; 6 Spring Seal;
- 7 Standard Escutcheon

Model	NX025	NX026
Style	Pendent Sprinkler	
Bulb Nominal Dia. & Response	Ø5mm, Standard Response	Ø3mm, Quick Response
Thread Size	□NPT1/2 or □R1/2	
Nominal Orifice Size	1/2 Inch	
Nominal K-Factor	5.6 (U.S.) / 80 (metric)	
Max. Working Pressure	175 psig / 1.2 MPa (12 bar)	
Sprinkler Finish	□Natural Brass or □Chrome Plated	
Nominal Temp. Rating	□ 135°F/57°C or □ 155°F/68°C or □ 175°F/79°C or □ 200°F/93°C	
Max. Ambient Temp.	135°F, 155°F: 100°F (38°C) 175°F, 200°F: 150°F (65°C)	
Listings and Approvals	UL	